
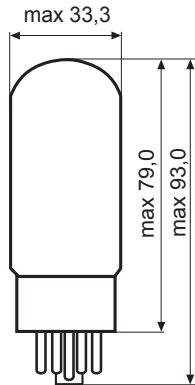


# GZ34S

DOUBLE ANODE RECTIFYING TUBE



## Base: OCTAL

$$U_f = 5 \text{ V}$$

$$I_f = 1,9 \text{ A}$$

## Typical Characteristics:

### Capacitor Input

f = 50 Hz	2x300	2x400	2x500	2x550	V
$U_{tr\text{eff}}$	250	250	200	160	mA
$I_{d.c.}$	60	60	60	60	$\mu\text{F}$
$R_t$	2x75	2x125	2x175	2x200	$\Omega$
$U_{d.c.}$	330	430	560	640	V

### Choke Input

f = 50 Hz	2x300	2x400	2x500	2x550	V
$U_{tr\text{eff}}$	250	250	250	225	mA
$I_{d.c.}$	10	10	10	10	H
$R_t$	0	0	0	0	$\Omega$
$U_{d.c.}$	250	330	420	465	V

## Limiting Values:

### Capacitor Input

f	50	Hz	
$U_{a\text{ invp}}$	1500	V	
$I_p$	750	mA	
C	60	$\mu\text{F}$	
$U_{tr\text{eff}}$	2x300	2x550	V
$I_{d.c.}$	250	160	mA
$R_t$	2x50	2x175	$\Omega$

### Choke Input

f	50	Hz	
$U_{a\text{ invp}}$	1500	V	
$I_p$	750	mA	
$U_{tr\text{eff}}$	2x300	2x550	V
$I_{d.c.}$	250	225	mA



# DOUBLE ANODE RECTIFYING TUBE

